



P3CARS.COM
PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from www.p3cars.com/install

Vent Install Guide for Mercedes CLA 250



1 Rotate trim ring counter-clockwise and remove.



2 Use a small pick or screwdriver to release the tabs and remove the inner vent ring.

WARRANTY & LIABILITY:

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

NOTE: PICTURES SHOW VENT REMOVED FROM VEHICLE FOR CLARITY



3 Using a small pick or screwdriver, spread the bracket and slowly pull vent out of the housing. (Remove vent carefully so that spring and tab do not fall out of the vent)



P3CARS.COM
PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from www.p3cars.com/install



(Spread the bracket so to disengage the vent)



Be careful not to let the spring and tab fall out of the back of the vent




4 With a firm pull, remove the housing from the dash trim.



5 Squeeze the housing to elongate and remove the flaps.

WARRANTY & LIABILITY:

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

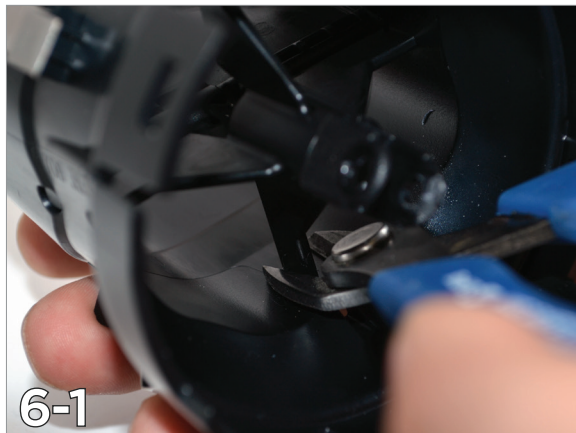

6 Cut the 4 points where the frame connects to the housing and remove the frame.






P3CARS.COM
PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from www.p3cars.com/install



7 Taking note of where the top of the housing is, ("Top" is molded into the housing) install the display in the housing so that it will be level when installed in vehicle.

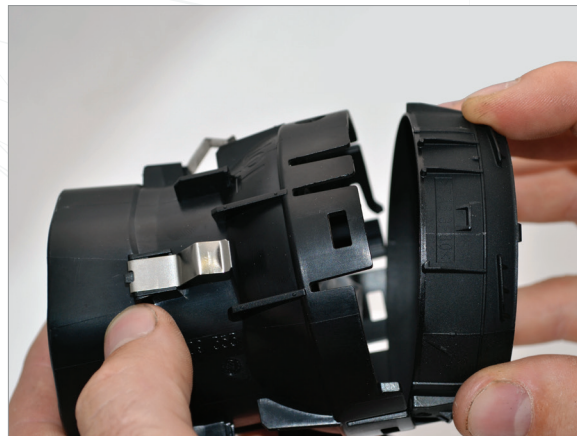

8 (Matching up the alignment slots) Install the inner vent ring.




9 (Matching the alignment tab on the ring to the slot on the housing) Install the trim ring and turn clockwise to lock into place.



WARRANTY & LIABILITY:

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

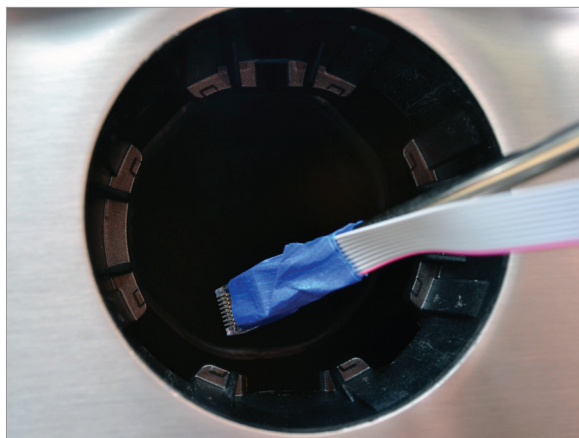

10 Using a long screwdriver or coat hanger, feed the display cable through the gap toward the gas pedal.



11 Pull the display cable out between the lower dash trim and the carpet.



P3CARS.COM
PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from www.p3cars.com/install




12 While gently pulling the end of the display cable to take out slack, install the housing back into the trim.



13 Remove the driver's side dash panel.




14 Feed control box end of OBD2 harness down through the dash.

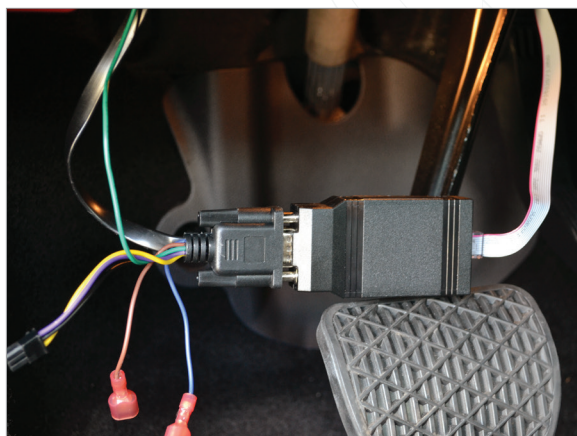

15 Route both the OBD2 cable and the display cable to the back of the lower dash trim just above the brake pedal and to the right of the hood release. Connect both cables to control box. (Be sure not to allow cables to interfere any moving parts such as the brake/-gas pedals and steering column)

WARRANTY & LIABILITY:

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

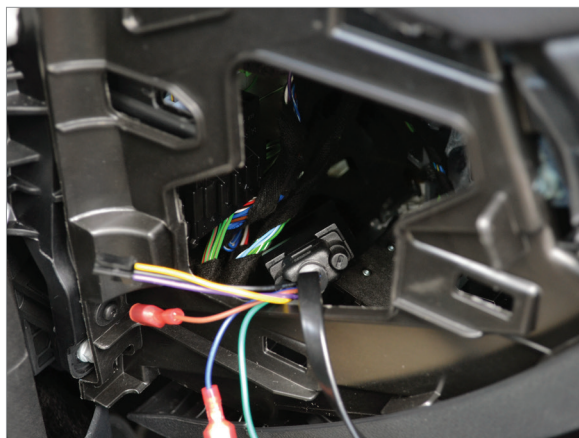

16 Gently feed/pull control box up through the dash to the cavity near the dash side panel.



17 Feed the OBD2 end of the OBD2 harness back down through the dash toward the brake pedal.



P3CARS.COM
PRECISION • PASSION • PERFORMANCE

Please download the latest copy of this document from www.p3cars.com/install



18 Drop OBD2 connector down just behind OBD2 port to the right of the hood release. Firmly connect OBD2 connector to the OBD2 port.



WARRANTY & LIABILITY:

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

19 You are now ready to enjoy your gauge!