



GEN 5 MUSTANG - VENT INSTALL GUIDE

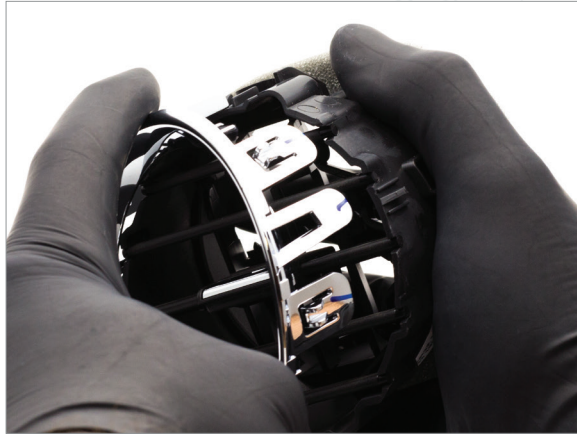

1 Release tabs on trim ring to remove it from vent housing.

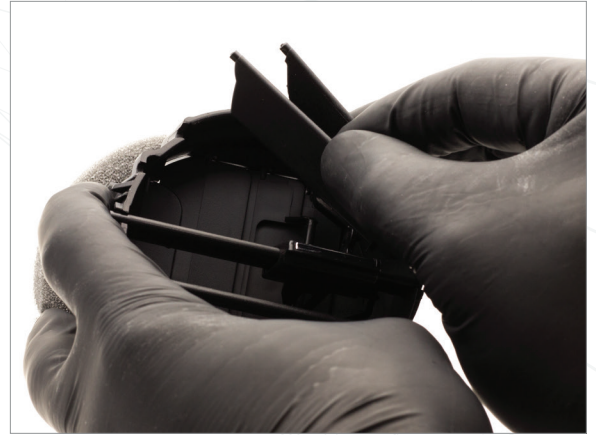

2 Remove top two horizontal slats from the vent housing.



3 Remove leftmost, vertical slat from back of the vent.



4 Feed cable through space where vertical slat was removed.

WARRANTY & LIABILITY:

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



5 Install display into vent housing.



6 Reinstall trim piece onto vent housing.



Please download the latest copy of this document from www.p3cars.com/install



7 You are now ready to install your vent into your vehicle!

WARRANTY & LIABILITY:

Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.