




For additional install information please visit [www.p3gauges.com/install](http://www.p3gauges.com/install)

# Cadillac ATS Install Guide

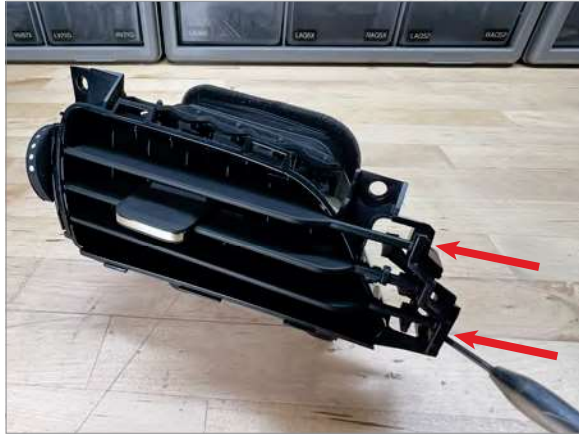

**1** Use screwdriver to pry vent slats out from right side of vent (top and bottom)



**2** Remove slat assembly by popping top and bottom slats out of housing (middle slat will slide out)




**3** Separate center slat from top and bottom slat



**4** On right side of center slat, remove section of wheel shape as shown

**WARRANTY & LIABILITY:** Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

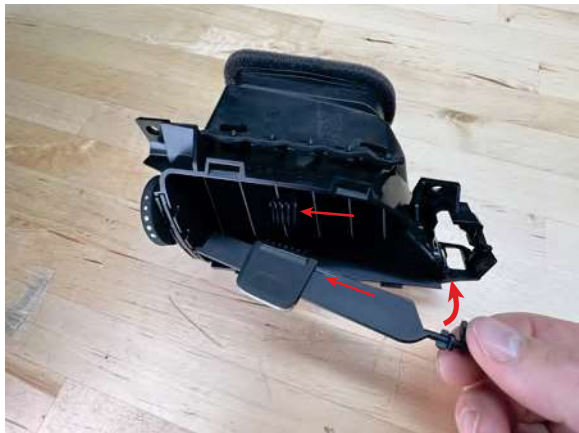

**5a** Move vertical slats and slider to max left position. Install modified center slat into bottom slat position



**5b** Once installed, slat should fit in housing as shown



For additional install information please visit [www.p3gauges.com/install](http://www.p3gauges.com/install)



**6a** Feed ribbon cable through left side of vent with pink side on bottom



**6b** Make sure cable is flat against vent housing




**7** Install display by aligning left pegs with holes in vent then rotating right side of display into place



**8** Close vent flap to hold cable in place. Pinch cable around back of vent as shown

**WARRANTY & LIABILITY:** Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

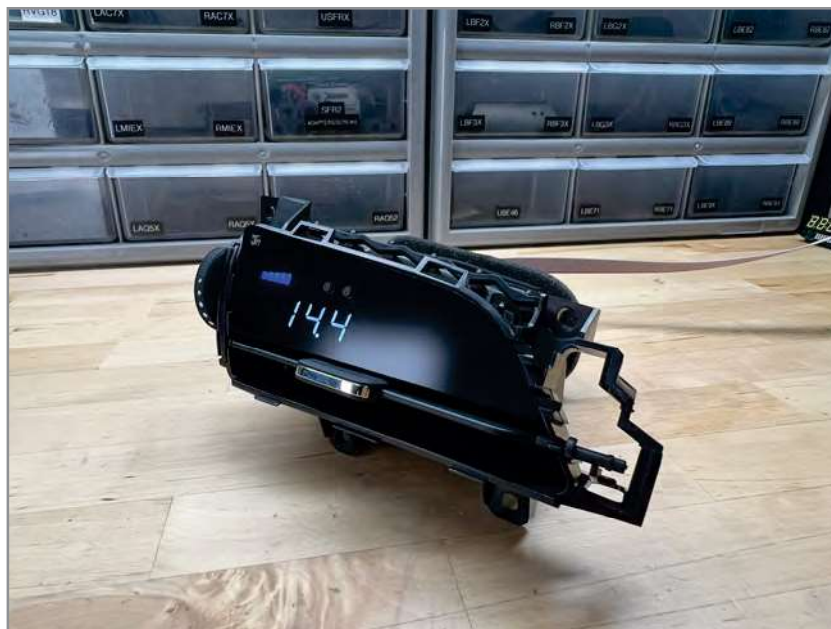

You can now reinstall into vehicle