



For additional install
information please visit
www.p3gauges.com/install

Chevy SS Install Guide



1 Using a small screwdriver, release the 9 clips around the trim to remove it.



2 Remove slat assembly as shown.



3 Remove 3 center slats from slat assembly and keep in order as shown. Upper removed center slat will not be reused. Middle slat will be used in step 4.



4 Remove slider from center slat. Save slider for step 5, slat will not be reused.

WARRANTY & LIABILITY:
Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



5a Flip slider upside down (fork on top) and install on lower-middle slat as shown.




5b Reinstall slat into lowest open position in slat assembly.




For additional install
information please visit
www.p3gauges.com/install



6 Reinstall slat assembly making sure slider fork properly engages with vertical slats for left/right movement.

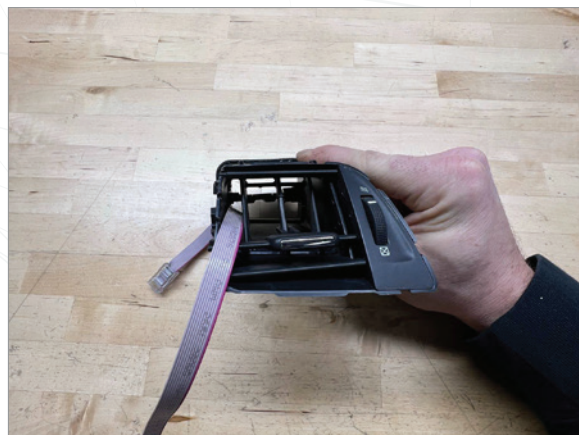

7 Feed display cable through vent as shown. (pink side down, cable flat against housing)

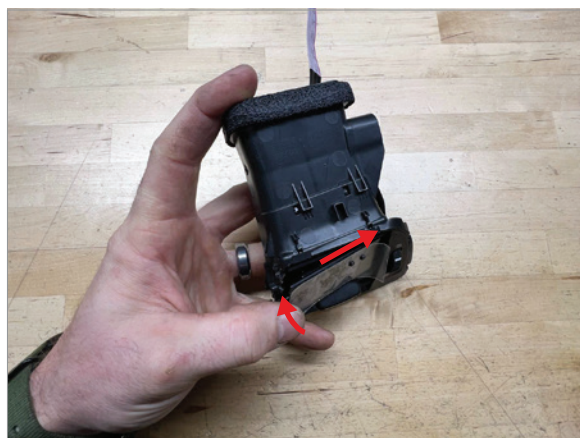

8 Insert right side of display into slat holes, then rotate display into place.



9 Reinstall trim onto vent housing.

WARRANTY & LIABILITY:
Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



10 Fold display cable around back of vent as shown and close flap to hold in place.



Now ready to reinstall in vehicle.