

Ford Focus RS MK3 Vehicle Install



Plug the gauge into the vehicle's OBD2 port and start engine to test functionality BEFORE installation



Remove dash side panel.



Unscrew Torx screw (T20).



Partially disengage vent assembly from dash trim by sliding towards driver seat.

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



Unplug connector from headlamp control panel underneath the air vent. Then fully remove the air vent from dash trim.



Release clips to remove vent facia from vent. There are 5 on each side.





After all clips are released, separate the facia from the vent.



With a flat-edged trim tool, push the vertical vent slats from behind the slats outwards, being careful only to exert enough force to "pop" them out.

Pushing too far may break the slat pins on the bottom of the vent slats.



Hinge the vertical slats out and pull them out.



Route the display cable through the vent.

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or anty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



Insert the display tabs into the existing vent groves.



Replace the vent facia.





Feed display cable through the vent dash trim.



Position the air vent in preparation to reinstall it back into the dash trim. Plug connector from dash trim back into head lamp control panel.



Replace the T20 Torx screw to secure the vent to the dash trim.



Remove the storage compartment and route the display cable as shown by the red arrows. Connect display cable to control box.

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.




Plug in the OBDII cable from the P3
Gauge Control Box. Secure wiring
as preferred being mindful of moving
parts.



Reinstall the dash side panel.



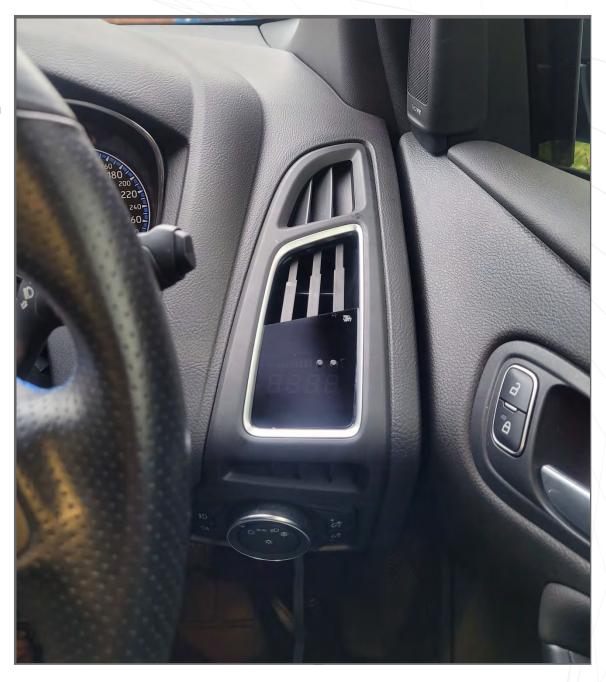

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

Your installation is now complete!