



For additional install information please visit www.p3gauges.com/install

MINI R55-59 Vehicle Install



1 Plug the gauge into the vehicle's OBD2 port and start engine to test functionality before installation



2 Move the steering wheel to lowest and fully extended position



3a Use a trim tool to remove the dash trim behind the steering wheel as shown



3b Remove trim from behind tachometer

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



4 Slide display into trough on top of trim until right side is flush with edge of trim. Fold cable around back of trim as shown.



5 Use a trim tool to remove the side panel from the dash



For additional install information please visit www.p3gauges.com/install




6a Pull back the rubber liner from the dash as shown



6b Feed the display cable through the hole and out the side of the dash



7 Replace the dash trim with the display enclosure installed

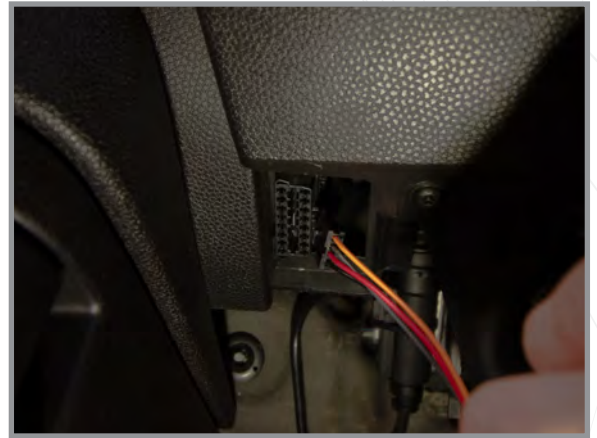

8a Feed the small end of the OBD2 cable up through the hole next to the OBD2 port and out the side of the dash. Reconnect main harness.

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



8b Plug the OBD2 cable into the OBD2 port



9 Connect the cables to the control box. Stow the box and replace the side dash panel



For additional install
information please visit
www.p3gauges.com/install



Your installation is now complete

WARRANTY & LIABILITY:
Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.