



For additional install information please visit www.p3gauges.com/install

991 911 Vent Install Guide



1 Use a trim tool to remove trim surrounding light switch/ignition



2 Use a trim tool to loosen the vent from its place in the dash



3 Pull the vent straight back towards the driver to remove it from the dash




4 Unclip the connector for the lighted vent wheel.

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.




5 If you did not purchase your gauge pre-installed in an OEM vent, use display install guide to install display into vent.

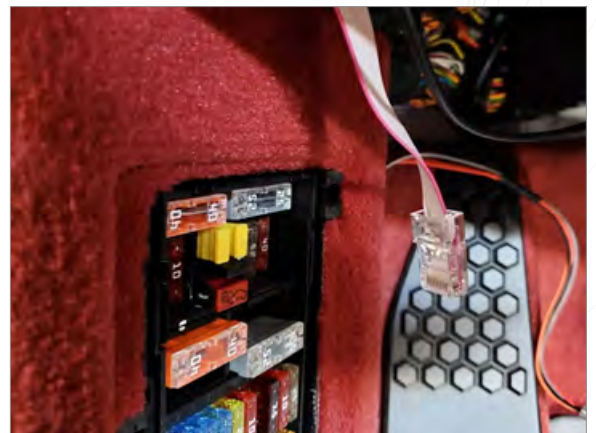

6 Feed the display cable down to the fuse panel in the driver's footwell and connect to the control box



For additional install information please visit www.p3gauges.com/install

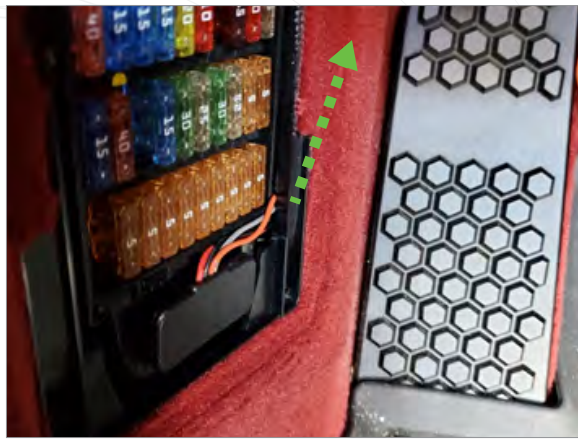

- 7 Feed OBD2 harness through opening in fuse box and out from behind carpet (OBD2 Harness can be seen in step 6.) Connect to main harness and control box. Then plug OBD2 connector into port.



WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

Your installation is now complete